


OVERVIEW	Designer Year	Dirk van der Kooij 2017
	Dimensions Weight	Ø120xH18cm 25kg
	Material	Recycled synthetic shell, brass & steel fixtures
	Country of Origin	The Netherlands
ILLUMINATION	Light Source	LED
	Light Output	7.700lm
	Colour Temperature (LED)	2700K
	Colour Output	±2300K
	Life Hours	50.000
	CRI	95+
POWER - EU	Max. Usage	119W 0,52A
	Input	230VAC 50/50Hz
POWER - US	Max. Usage	122W 1,03A
	Input	120VAC 50/60Hz
DIMMING <i>Specify when ordering</i>	3-in-1 dimming driver	Compatible with resistive (potentiometer), 0–10V, and 10V PWM dimming controls. Connect two signal wires from your chosen control type to the dimming input. Requires standard mains wiring (L,N,G) plus two low-voltage dimming wires.
	DALI	Requires a DALI controller and a separate control bus (2 additional wires). Allows for precise, programmable dimming and grouping of multiple fixtures.
COMPLIANCE	Electrical Components	CE UL
CANOPY	Dimensions Weight	Ø20xH10cm 7,6kg
	Material	RAL9010 powdercoated steel
SUSPENSION	Suspension Cable	150-500cm standard, custom upon request.
	Angle	Manually adjustable
CARE	The Buitenhuis is for indoor use only. Dust regularly. Avoid acetone or chemical cleaners on plastic. Clean brass with a soft cloth and pH-neutral soap; dry immediately.	
MATERIALITY	Due to the recycled nature of our transparent materials, tint may vary slightly between lamps. For the best match, we recommend ordering multiples together.	
WARRANTY	Kooij products include a limited warranty — see kooij.com/warranty .	



OVERVIEW	Designer Year	Dirk van der Kooij 2017
	Dimensions Weight	Ø160xH18cm 35kg
	Material	Recycled synthetic shell, brass & steel fixtures
	Country of Origin	The Netherlands
ILLUMINATION	Light Source	LED
	Light Output	10.700lm
	Colour Temperature (LED)	2700K
	Colour Output	±2300K
	Life Hours	50.000
	CRI	95+
POWER - EU	Max. Usage	144W 0,63A
	Input	230VAC 50/50Hz
POWER - US	Max. Usage	148W 1,26A
	Input	120VAC 50/60Hz
DIMMING <i>Specify when ordering</i>	3-in-1 dimming driver	Compatible with resistive (potentiometer), 0–10V, and 10V PWM dimming controls. Connect two signal wires from your chosen control type to the dimming input. Requires standard mains wiring (L,N,G) plus two low-voltage dimming wires.
	DALI	Requires a DALI controller and a separate control bus (2 additional wires). Allows for precise, programmable dimming and grouping of multiple fixtures.
COMPLIANCE	Electrical Components	CE UL
CANOPY	Dimensions Weight	Ø20xH10cm 7,6kg
	Material	RAL9010 powdercoated steel
SUSPENSION	Suspension Cable	150-500cm standard, custom upon request.
	Angle	Manually adjustable
CARE	The Buitenhuis is for indoor use only. Dust regularly. Avoid acetone or chemical cleaners on plastic. Clean brass with a soft cloth and pH-neutral soap; dry immediately.	
MATERIALITY	Due to the recycled nature of our transparent materials, tint may vary slightly between lamps. For the best match, we recommend ordering multiples together.	
WARRANTY	Kooij products include a limited warranty — see kooij.com/warranty .	

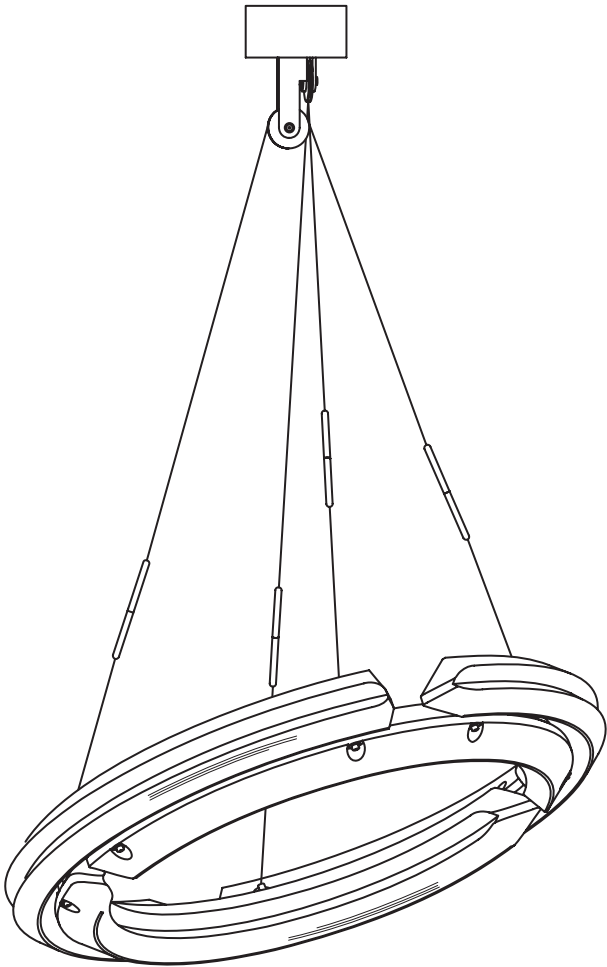